

MANUAL-TIE HORIZONTAL BALERS



Stealth

Manual-Tie Horizontal Baler



*Stealth Baler
60" configuration pictured*



Stealth Series Features

- ▼ Specifically designed for baling OCC and similar materials
- ▼ Available in 60" or 72" bale length
- ▼ Hydraulic bale door release
- ▼ Hand-feed-type hopper
- ▼ Customizable for your application

The Worldwide Leader in Quality Recycling and Compaction Equipment

Marathon® Equipment is known throughout the world as one of the leading manufacturers of quality on-site recycling products. The **Marathon** brand has been the industry standard for quality and innovation for more than 50 years, and includes auto-tie balers, manual-tie balers, two-ram balers, MRF systems, conveyors, vertical balers, auger-style compactors, cart dumpers, and a wide array of options for virtually any application.



**Environmental
Solutions Group®**

a DOVER company

Stealth Horizontal Baler

Features



Stealth Horizontal Baler Standard Features

- ▼ 46" x 60" feed opening
- ▼ Available in 60" or 72" bale length
- ▼ Standard hand-feed-type hopper
- ▼ Hydraulic bale door release
- ▼ Up to two tons-per-hour throughput (OCC)
- ▼ Through-door and side tie-off
- ▼ Start-up alarm
- ▼ Control panel equipped with electrical disconnect switch
- ▼ Bale made alarm

Stealth Horizontal Baler Optional Features

- ▼ Photocell control
- ▼ Chute-feed hopper
- ▼ In-feed conveyor
- ▼ Cart dumper



Hydraulic Door Latch

The **Marathon** Stealth Series balers feature a hydraulic door latch.



Optional Chute-Feed Hopper

The optional chute-feed hopper with inspection door and interlock switch will accommodate pneumatic, gravity, or conveyor feeding systems.

MANUAL-TIE HORIZONTAL BALERS




Stealth Manual-Tie Horizontal Baler


Dimensions & Specifications

Specifications	Stealth 60"	Stealth 72"
Bale Size	42" x 48" x 60" 1067mm x 1219mm x 1524mm	42" x 48" x 72" 1067mm x 1219mm x 1829mm
Bale Weight (OCC)	Up to 1,500 lbs. Up to 680 kg	Up to 1,500 lbs. Up to 680 kg
Throughput	Up to 2 tons per hour Up to 1800 kg per hour	Up to 2 tons per hour Up to 1800 kg per hour
Performance Characteristics		
Maximum System Pressure	2,400 psi 165 bar	2,400 psi 165 bar
Maximum Force	67,900 lbf. 302 kN	67,900 lbf. 302 kN
Ram-Face Pressure	43 psi 296.5 kPa	43 psi 296.5 kPa
Cycle Time	50 sec.	50 sec.
Weight (dry)	12,600 lbs. 5715 kg	13,000 lbs. 5897 kg
Electrical Equipment		
Electric Motor 460 / 3-Phase		20 hp 14.9 kW
Electric Control Voltage		120 VAC
Hydraulic Equipment		
Pump Type		Gear
Pump Flow		18.5 gpm 70 L/min.
Reservoir		30 gal. 113.6 L
Hydraulic Cylinders (Bore)		6" 152mm
Hydraulic Cylinders (Rod)		4" 102mm
Hydraulic Cylinders (Stroke)		82" 2083mm


Pictures and mechanical diagrams in this literature are illustrative only and may not be to scale. Specifications are subject to change without notice in order to accommodate improvements to the equipment. Certified in compliance with ANSI standard Z245.2 and all applicable OSHA Regulations. Products must be used only by trained operators in accordance with the Operator Manual, as well as applicable regulations, laws, and ANSI standards.



REAR VIEW

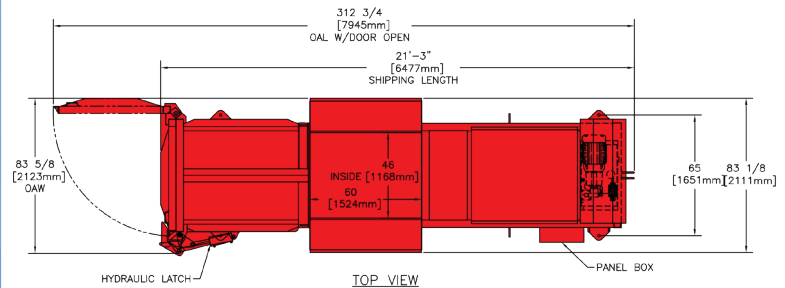

TOP VIEW

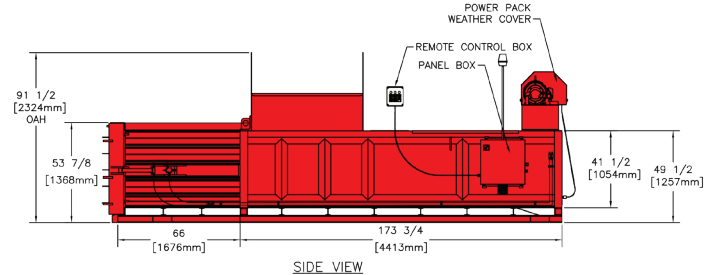

SIDE VIEW

Dimensions	Length	Width	Height	Hopper Type	Feed Opening (L x W)	Feed Height
Stealth 60"	255"	83 5/8"	91 1/2"	Hand Feed	46" x 60"	69 5/8"
	6477mm	2123mm	2324mm		1168mm x 1524mm	1768mm
Stealth 72"	267"	83 5/8"	91 1/2"	Hand Feed	46" x 60"	69 5/8"
	6782mm	2123mm	2324mm		1168mm x 1524mm	1768mm

We're Here To Help!

For detailed specifications, recommendations, or to request a site survey comparing various systems, contact the Marathon® Sales Team at MarathonSales@MarathonEquipment.com

Authorized Dealer:



Awarded Contract

Contract # 040621-MEC

Marathon Equipment Company | P.O. Box 1798 | Vernon, AL 35592-1798

Learn more about Marathon Equipment: 800.633.8974 | www.marathonequipment.com